




Benfer®
Building Product Systems

PREMIUM SOLUTIONS

NEW FROM OCTOBER 2026

THE COMPLETE SOLUTION.

LATICRETE® & BENFER® PRODUCTS
NOW AVAILABLE FROM TILE RITE®

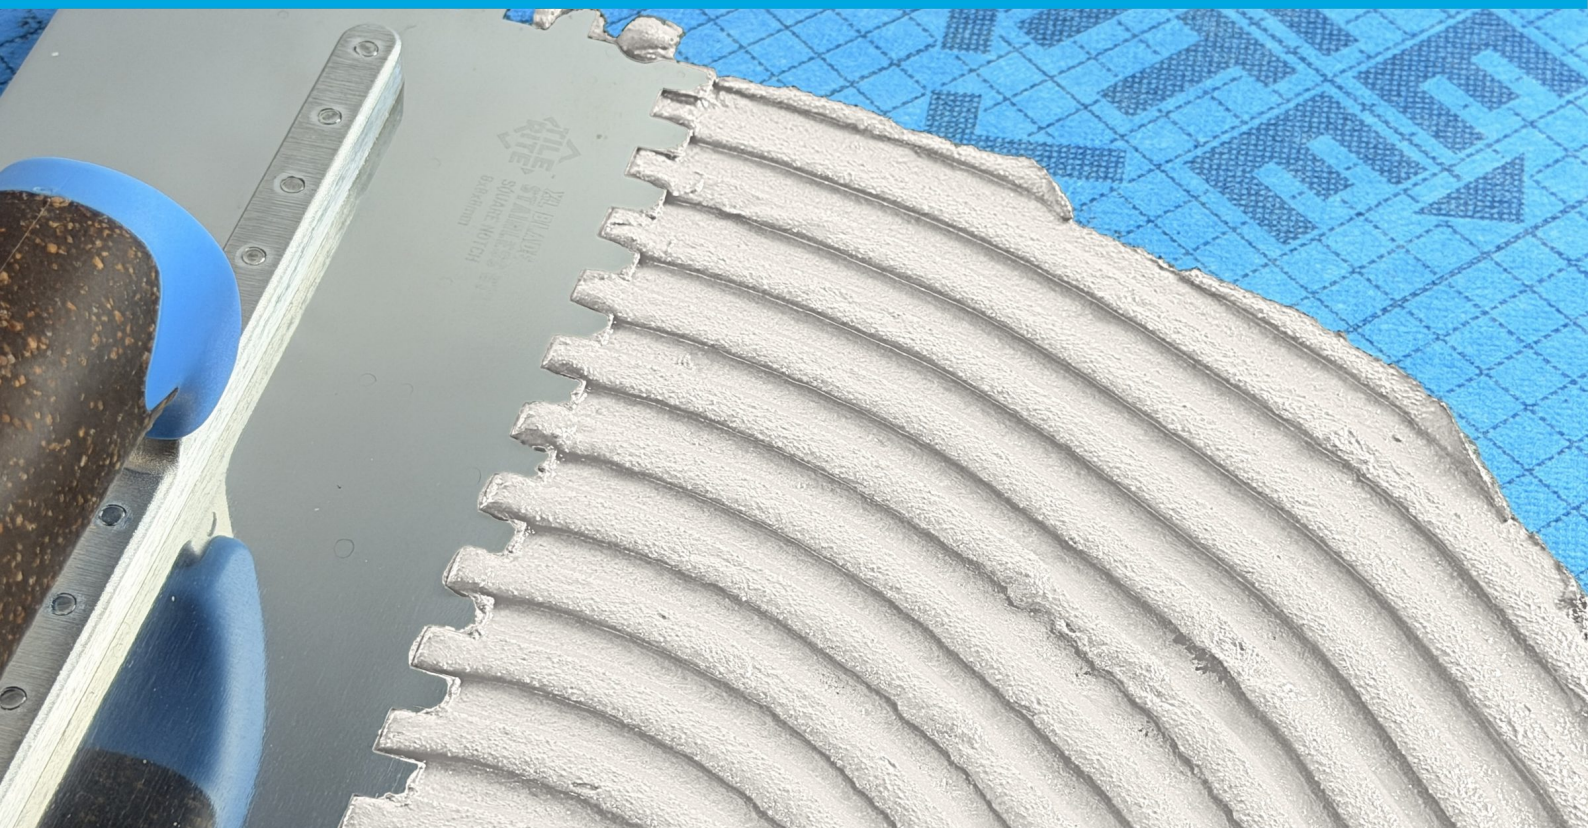

SUBSTRATE PREP
PRIMERS & LEVELLERS

WATERPROOFING
WET AREAS

ADHESIVES
WALLS & FLOORS

GROUTS & SEALANTS
30 COLOURS


TILERITE.CO.UK

Call us on 01543 500893

BUILT ON HERITAGE. DELIVERING THE FUTURE.

A COMPLETE TILING SOLUTION IN ONE PLACE.

We're proud to be a Premium Partner for LATICRETE® and Benfer® worldwide. By bringing their market leading range of installation products to the Tile Rite counter, you get world class chemistry alongside the tools you already trust from one supplier, on one delivery.

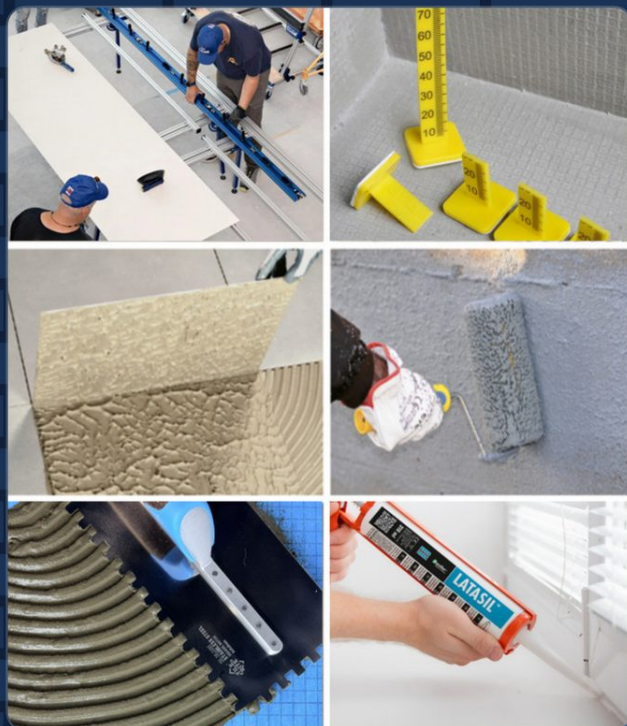

WORLD-CLASS PERFORMANCE

Trusted by professionals in over 100 countries, LATICRETE systems are specified on the world's most demanding projects.

SYSTEMS THAT WORK TOGETHER

Complete solutions for every stage of the tiling process – primer to sealant, tested as a system.

TRUSTED BRANDS, PROVEN RESULTS

Backed by decades of innovation and real world reliability on walls, floors and wet rooms.

EXPERT SUPPORT

Technical advice and support – before, during and after your project.

ONE SUPPLIER. ONE ORDER. ONE COMPLETE SYSTEM.

From preparation to protection: LATICRETE® and Benfer® products deliver reliable performance in one order, one delivery, one point of contact.

SPEAK TO OUR TEAM
TODAY

01543 500893



SINCE 1956

Pioneering installation solutions from the USA – adhesives, grouts and waterproofing trusted on landmark projects worldwide.



SINCE 1960

Italian made primers, levellers and rapid set adhesives engineered for demanding European substrates.



SINCE 1989

The brand to trust. 500+ professional tiling tools and consumables, at the trade counter and ready when you are.



PREMIUM SOLUTIONS – THE LATICRETE & BENFER RANGE

PAGES 4–10

1 SUBSTRATE PREP

Primers, bonding agents and a self leveller for the perfect start.

- BENFERPRIM universal primer
- STARPRIM bonding agent
- MULTIPLAN 50-FI self leveller

PAGE 4

2 ADHESIVE & WATERPROOFING

Mosaic adhesive and the wetroom membrane that goes down before the tiles.

- BENFERGRIP+ adhesive
- HYDRO BAN® membrane

PAGE 5

3 CEMENT ADHESIVES

High performance cements and adhesives for walls and floors.

- 335 MAXI S · 335 RAPID
- BENFERFLEX+ S1 · Rapido

PAGES 6–7

4 GROUTS & SEALANTS

Durable, stain resistant grouts and colour-matched sealants.

- SPECTRALOCK® PRO PREMIUM epoxy grout
- PERMACOLOR® cementitious grout
- LATASIL™ AC silicone

PAGES 8–10

THE TILE RITE® RANGE – THE BRAND TO TRUST

PAGES 11–15

CUTTING & LEVELLING

Precision cutting and levelling systems for every tile format.

- Katana™ SR-41 tile cutter
- GPTP rail cutting system
- Floor levelling pegs

PAGE 11

FITTING

Membranes, backer boards, fixings and accessories to fit right first time.

- Decoupling & stress relief membranes
- Thermaboard & ultra light backer
- Board fixings & accessories

PAGES 12–14

FINISHING

Grout floats and finishing tools for the final pass.

- Cork handle trowels
- Grout floats, incl. epoxy

PAGE 15



TO VIEW OUR FULL RANGE VISIT WWW.TILERITE.CO.UK

Scan the code to browse all 500+ Tile Rite® tools and consumables, with full specifications and data sheets.

PRIMERS & LEVELLERS



BENFERPRIM – 1 KG & 5 KG

BENFERPRIM

A polymeric dispersion primer designed to consolidate weak and dusty substrates, reduce water absorption and provide an ideal surface for subsequent products and coverings.

- Ready to use – solvent free, low emissions (A+ rated)
- Rapid drying – ready for tiling after just 1 hour
- Consolidates dusty and inconsistent substrates
- Ideal for cement based plaster, gypsum, screeds and anhydrite
- Interior and exterior use, walls and floors

TECHNICAL CHARACTERISTICS

Consumption ~200 g/m² · traversable after ~1 hour · ready for tiling from 1 to 24 hours.



STARPRIM – 2 KG & 5 KG

STARPRIM

The reliable first coat on walls and floors. STARPRIM improves adhesion and seals substrates before tiling, levelling or waterproofing – one product for almost every background, inside and out.

- Suitable for non-porous substrates
- Improves adhesion of adhesives, levellers and waterproofing
- Seals and regulates porous substrates
- Multi-purpose – walls and floors, interior and exterior
- Available in 2 kg and 5 kg buckets



MULTIPLAN 50-FI – 20 KG BAG

MULTIPLAN 50-FI

Fibre reinforced rapid setting cement based self-levelling compound for smoothing and levelling in layers of 3–50 mm, over concrete, screeds, old tiled finishes and timber overlays.

- Fibre reinforced – suitable on plywood overlay
- Suitable on underfloor heating
- Fast curing – traversable after 2–3 hours, tile after ~24 hours
- Easy to process – can be pump applied
- Layers from 3 to 50 mm in one pour

TECHNICAL CHARACTERISTICS

EN 13813 CT C30-F7 A1fl · pot life ~30 min · 1.65 kg/m²/mm · 30 N/mm² at 28 days.

ORDER CODES

ITEM NUMBER	PRODUCT	CATEGORY	UNIT
28-09560-0121	BENFERPRIM universal primer	Primer	1 kg
28-01520-0005	BENFERPRIM universal primer	Primer	5 kg
28-09571-E002	STARPRIM primer & bonding agent	Primer	2 kg
28-09571-E005	STARPRIM primer & bonding agent	Primer	5 kg
28-12504-E020-IT	MULTIPLAN 50-FI self-levelling compound	Self-levelling	20 kg

Setting levels: Tile Rite® floor levelling pegs (FLP887, pack of 200) are the ideal partner for MULTIPLAN 50-FI – self-adhesive pins with a 10–100mm scale, no drilling. See page 11.

**BENFERGRIP+ – ULTRA WHITE ADHESIVE****BENFERGRIP+**

An ultra white, high-grab adhesive whose smooth consistency reduces fatigue. Perfect for glass and ceramic mosaics, Klinker and thick floor coverings – including over tiling internal old floors.

- Over tiling internal old floors
- Ultra white with high resistance to sliding – application without spacers
- Perfect for glass and ceramic mosaics
- Long open time
- Smooth consistency reduces fatigue
- EN 12004 C2TE

TECHNICAL CHARACTERISTICS

EN 12004 C2TE · pot life ~3 hours · foot traffic ~12 hours · consumption 3.5–5 kg/m².

**HYDRO BAN® – 5 KG****HYDRO BAN®**

HYDRO BAN® is a thin waterproofing membrane that does not require reinforcement fabric, not even near corners and edges – a single component liquid rubber polymer that cures to a highly flexible, continuous membrane bonding directly to metal and PVC.

- Ready to use – applied with brush, roller or trowel
- Fast setting – flood test after just 2 hours
- Inhibits mould and bacteria – Microban® protection
- Anti-fracture for cracks up to 3 mm – no fabric needed on smaller cracks
- Safe – no solvents, non-flammable
- Adheres directly to metal and PVC pipes

TECHNICAL CHARACTERISTICS

EN 14891 DM01P · positive pressure resistance ~1.5 bar · crack-bridging ~5 mm · tile after ~2 hours.

**ORDER CODES**

ITEM NUMBER	PRODUCT	COLOUR	CLASS	UNIT
28-11084-E020-22-IT	BENFERGRIP+	Ultra White	C2TE	20 kg
24-17042-E005-M	HYDRO BAN® waterproofing membrane	Green	EN 14891	5 kg
24-S-09235-NF-19	Anti-fracture mini fabric	White	—	22.9 m roll

335 MAXI S & 335 RAPID



335 MAXI S – 20 KG BAG

335 MAXI S

335 MAXI S is a highly flexible adhesive, reinforced with polymers for high deformability. Ideal for laying large porcelain stoneware slabs, and for exterior, wall and floor applications.

- Little dust and low VOC emissions – better indoor air quality
- Excellent workability – multi-consistency mixing
- Non-sag – good for vertical applications
- Ideal for large sized tiles
- Long open time
- Available in ultra white and grey

TECHNICAL CHARACTERISTICS

EN 12004 C2TE S1 · max thickness 20 mm · walkability ~12 hours · consumption 4–8 kg/m².



335 RAPID – 20 KG BAG

335 RAPID

335 RAPID is a flexible adhesive modified with polymer for thin and medium bed installations. Its fast hydration makes it easy to use – ideal for projects with time constraints and for natural stone.

- Low VOC emissions
- Flexible with excellent workability – easy to use
- Ready for grouting in just 3 hours
- For natural stone
- Available in ultra white and grey
- Ultra white – ideal for translucent marbles or stones subject to staining

TECHNICAL CHARACTERISTICS

EN 12004 C2FT S1 · max thickness 15 mm · pot life ~45 min · walkability ~3 hours · consumption 3–7 kg/m².

ORDER CODES

ITEM NUMBER	PRODUCT	COLOUR	CLASS	UNIT
24-0335-E-0020-21-1-M	335 MAXI S	Grey	C2TE S1	20 kg
24-0335-E-0020-22-1-M	335 MAXI S	Ultra White	C2TE S1	20 kg
24-0335-E-0020-21-4-M	335 RAPID	Grey	C2FT S1	20 kg
24-0335-E-0020-22-4-M	335 RAPID	Ultra White	C2FT S1	20 kg

On the trowel: Tile Rite® cork handle trowels (CHT739–743) are the industry's best grip – and the Tiger Trowel LATICRETE use in their own training. See page 15.

BENFERFLEX+ S1 & RAPIDO



BENFERFLEX+ S1 – 20 KG BAG

BENFERFLEX+ S1

An adhesive of cements, graded aggregates, synthetic resins and special additives – formulated for reliable installation of almost all ceramic material, even on non-absorbent substrates. High resistance to vertical sliding allows tiling from the top down.

- Highly deformable – tested to EN 12004 C2TE S1
- Multi-purpose – create different mixes from thixotropic to flow-bed with variable water ratios
- Highly resistant to shrinkage
- Long open time and very easy to use
- Suitable for heated substrates, terraces and swimming pools

TECHNICAL CHARACTERISTICS

EN 12004 C2TE S1 · pot life ~3 hours · foot traffic ~12 hours · max tile side up to 360 cm.



BENFERFLEX RAPIDO – GREY AND WHITE, 20 KG BAGS

BENFERFLEX RAPIDO

A flexible adhesive with high-strength cements, graded aggregates and special resins, developed to lay marble, gres, natural stones, porcelain and ceramic tiles quickly and safely, even on non-absorbent and variable surfaces.

- Rapid setting – grout after just 2-3 hours
- Suitable for use on plywood overlay
- Ideal for porcelain and large format tiles
- Application thickness up to 15mm
- Increased flexibility – ideal for applications on heated screeds

TECHNICAL CHARACTERISTICS

EN 12004 C2FTE S1 · pot life ~30 min · foot traffic 2-3 hours · consumption 3.5-5 kg/m².

ORDER CODES

ITEM NUMBER	PRODUCT	COLOUR	CLASS	UNIT
28-12534-E020-22	BENFERFLEX+ S1	White	C2TE S1	20 kg
28-01080-0020-21-IT	BENFERFLEX RAPIDO	Grey	C2FT S1	20 kg
28-01080-0020-22-IT	BENFERFLEX RAPIDO	White	C2FT S1	20 kg

On the trowel: Tile Rite® cork handle trowels (CHT739-743) are the industry's best grip – and the Tiger Trowel LATICRETE use in their own training. See page 15.

SPECTRALOCK® PRO PREMIUM GROUT



High-performance stainproof three-component epoxy grout for joints from 1.5 mm to 12 mm.

For wet areas, swimming pools and anywhere the finish has to last. SPECTRALOCK PRO PREMIUM GROUT is a high-performance epoxy grout featuring extraordinary colour uniformity and durability, with pre-portioned 3.2 kg kits — part A, part B and colour part C in one box.

FEATURES & BENEFITS


- Ideal for submerged applications — pools, fountains and water features
- Highly stain resistant
- Thixotropic formula for walls and floors
- Strong, long lasting and resistant to cracking
- Even colour — three component, lets you regulate the consistency
- Maintenance free and does not fade
- Meets ANSI A118.3, ISO 13007-3 RG and EN 13888 RG

TECHNICAL CHARACTERISTICS

EN 13888 RG · pot life ~80 min · walkability ~24 hours · joints 1.5–12 mm · compressive strength ~50 N/mm².



SPECTRALOCK® PRO PREMIUM GROUT – 3.2 KG KIT, PRE-PORTIONED

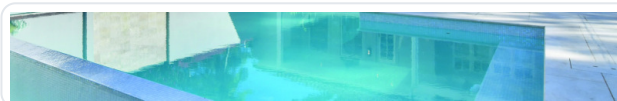

DID YOU KNOW?

SPECTRALOCK PPG never needs sealing — the colour you mix is the colour you keep.

KIT COLOURS



BRIGHT WHITE
1244



STERLING SILVER
1278



SILVER SHADOW
1288



SMOKE GREY
1289



LIGHT PEWTER
1290

ORDER CODES

ITEM NUMBER	PRODUCT	COLOUR	CLASS	UNIT
24-1244-0032-KIT	SPECTRALOCK PPG kit	☐ 1244 Bright White	RG	3.2 kg
24-1278-0032-KIT	SPECTRALOCK PPG kit	☒ 1278 Sterling Silver	RG	3.2 kg
24-1288-0032-KIT	SPECTRALOCK PPG kit	☐ 1288 Silver Shadow	RG	3.2 kg
24-1289-0032-KIT	SPECTRALOCK PPG kit	☐ 1289 Smoke Grey	RG	3.2 kg
24-1290-0032-KIT	SPECTRALOCK PPG kit	☐ 1290 Light Pewter	RG	3.2 kg

Grouting tools: the SUPER FLEX grout float (SFGF142) is perfect for cement and epoxy grouts; cork handle floats CHF744 (standard) and CHF746 (universal/epoxy) complete the kit. See page 15.

Easy to mix, apply and clean – for floors, walls and swimming pools. Exclusive Water Dispersion Technology delivers colour durability and aesthetics, with anti-microbial protection built in.

FEATURES & BENEFITS

- For swimming pools, fountains and other applications in constant immersion
- Rapid setting – walk on after just 3 hours
- Fibre reinforced, anti-cracking and anti-shrinkage
- Contains anti-microbial protection (mould resistant)
- Requires no additional treatments – built in Stonetech® Sealer Technology
- Water Dispersion Technology for colour durability
- Low VOC emissions – safe and easy to install
- Nine colours, matched across the LATASIL AC silicone range



PERMACOLOR® – 2.5 KG RAPID-SET GROUT



TECHNICAL CHARACTERISTICS

EN 13888 CG2 WA · max grain ~0.15 mm · pot life ~45 min · walkability ~3 hours · compressive strength ~25 N/mm².

DID YOU KNOW?

Water Dispersion Technology keeps colour true on kitchen and bathroom tiling – mould resistant and easy to clean.

KIT COLOURS



ORDER CODES

ITEM NUMBER	PRODUCT	COLOUR	CLASS	UNIT
28-2744-E4025	PERMACOLOR #44	 Bright White	CG2 WA	2.5 kg
28-2722-E4025	PERMACOLOR #22	 Midnight Black	CG2 WA	2.5 kg
28-2724-E4025	PERMACOLOR #24	 Natural Grey	CG2 WA	2.5 kg
28-2745-E4025	PERMACOLOR #45	 Raven	CG2 WA	2.5 kg
28-2778-E4025	PERMACOLOR #78	 Sterling Silver	CG2 WA	2.5 kg
28-2785-E4025	PERMACOLOR #85	 Almond	CG2 WA	2.5 kg
28-2788-E4025	PERMACOLOR #88	 Silver Shadow	CG2 WA	2.5 kg
28-2789-E4025	PERMACOLOR #89	 Smoke Grey	CG2 WA	2.5 kg
28-2790-E4025	PERMACOLOR #90	 Light Pewter	CG2 WA	2.5 kg

Grouting tools: the SUPER FLEX grout float (SFGF142) is perfect for cement and epoxy grouts; cork handle floats CHF744 (standard) and CHF746 (universal/epoxy) complete the kit. See page 15.

Movement joints and perimeters disappear into the finish. LATASIL™ AC is a silicone sealant with acetic curing, low module, bactericide and fungicide. Colour matched across the PERMACOLOR and SPECTRALOCK ranges so the whole installation reads as one surface.

FEATURES & BENEFITS

- Superior adhesion, bactericide and fungicide
- Ideal for ceramic tiles, glass, clinker, bathroom fixtures, aluminium, anodised aluminium, plastic and painted surfaces
- Easy to extrude and smooth
- For movement joints, internal corners and sanitary junctions
- Suitable for wet areas – bathrooms, wetrooms and kitchens
- Nine colours plus translucent · standard 310 ml cartridge, gun applied



LATASIL™ AC – 310 ML CARTRIDGE, GUN-APPLIED

TECHNICAL CHARACTERISTICS

EN 15651 parts 1-3 · skin-forming ~20 min · curing ~3 mm/24 hrs · movement capacity ~25% · Shore A hardness ~20°.

KIT COLOURS



ORDER CODES

ITEM NUMBER	PRODUCT	COLOUR	CLASS	UNIT
28-6300-0120-NO-2	LATASIL AC 00	Translucent	Silicone	310 ml
28-6322-0120-NO-2	LATASIL AC 22	Midnight Black	Silicone	310 ml
28-6344-0120-NO-2	LATASIL AC 44	Bright White	Silicone	310 ml
28-6345-0120-NO-2	LATASIL AC 45	Raven	Silicone	310 ml
28-6378-0120-NO-2	LATASIL AC 78	Sterling Silver	Silicone	310 ml
28-6385-0120-NO-2	LATASIL AC 85	Almond	Silicone	310 ml
28-6388-0120-NO-2	LATASIL AC 88	Silver Shadow	Silicone	310 ml
28-6389-0120-NO-2	LATASIL AC 89	Smoke Grey	Silicone	310 ml
28-6390-0120-NO-2	LATASIL AC 90	Light Pewter	Silicone	310 ml

CUTTING & LEVELLING

Precision cutting for every tile format – from hand cutters to full rail systems for the largest slabs – plus fast, accurate level setting.



KATANA™ SR-41 TILE CUTTER

COMING SOON

10410

Available in two sizes – 800mm and 1000mm – for straight cuts on today's larger formats, with tile depth up to 16mm. Enclosed score chassis with 11 ball bearings for smooth cuts, extended handle for maximum breaking power and full-length side wing support arms. 3-year limited warranty.




GPTP RAIL CUTTING SYSTEM

TR75025

3050mm under-mount rail system for large-format cutting. Each rail equipped with four non-marring suction cups; includes two carry bags for breaker unit and rails. Each breaker unit has four adjustable leverage points, and the cutting head features reversible cutting wheel placement and a palm pad for added power and control.

IN USE

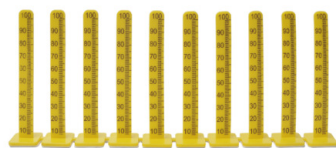


FLOOR LEVELLING PEGS – PACK OF 200

FLP887

Plastic, self-adhesive height-measurement pins for use with self-levelling screed – ideal with MULTIPLAN 50-FI. A time and cost-effective way of building new subfloors or levelling old uneven floors. High adhesive strength, engineered to stay straight and locked in place during a pour. Easy-to-read 10–100mm scale, no holes to drill, bright yellow for visibility.

IN USE

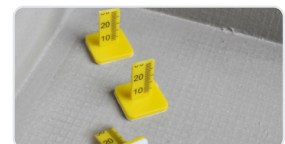

CHOOSING YOUR CUTTER

KATANA™ 800MM

Standard wall and floor formats up to 800mm. The everyday bench cutter.

KATANA™ 1000MM

Today's larger formats and diagonal cuts, tile depth up to 16mm.

GPTP RAIL SYSTEM

3050mm slabs and porcelain panels – cut in place, on site.

DECOUPLING & STRESS-RELIEF MEMBRANES



ALTAMAT UNCOUPLING MEMBRANE

ALT101 (30m × 1m) · ALT415 (5m × 1m)

Uncoupling — absorbs stresses in the subfloor to prevent tiles and grout from cracking. **Waterproofing** — protects the surface beneath the matting. **Vapour management** — blocks excess moisture vapour to prevent loose tiles, condensation and mould. **Load distribution** — allows loads to be distributed evenly. Suitable for use with underfloor heating.



PREMIUM

5 YEAR GUARANTEE

CLASSIC FLEXI DECOUP ORIGINAL

DECOUP ORIGINAL™ · 30m / 100cm / 3mm · CFD130

3-layer 100% polypropylene decoupling and sealing system. Prevents stress transfer to the tiled surface, bridges substrate cracks, fast and easy installation. Suitable for underfloor heating systems. **5-year guarantee.**




PREMIUM

DECOUP ORIGINAL ANTI-CRACK MATTING

DUR047 (5m × 1m) · DUR709 (30m × 1m)

Underlay matting for decoupling and waterproofing tiled flooring. Bridges small cracks in the subfloor and absorbs stresses to prevent tiles and grout from cracking. Allows water vapour pressure to be compensated where there is residual moisture in the subfloor. Suitable for use with underfloor heating.

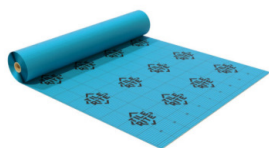

FABRITEQ STRESS RELIEF / WATERPROOF MAT — 50M

FAB500

Eliminates loose and cracked tiles and waterproofs, all in one. Can be laid on most floors: cement, OSB, tile backer boards and concrete. Bridges small cracks in the subfloor, absorbs stresses to prevent tiles and grout from cracking, and protects the surface beneath. Suitable for use with underfloor heating.

**5 YEAR
GUARANTEE**

CLASSIC FLEXI DECOUP ORIGINAL comes with a 5-year guarantee. Don't compromise: trust the original — the only decoupling membrane in this range backed by a full 5-year guarantee.

ORDER CODES

ITEM NUMBER	PRODUCT	SIZE	CLASS
ALT101	Altamat Uncoupling Membrane	30m × 1m	Uncoupling
ALT415	Altamat Uncoupling Membrane	5m × 1m	Uncoupling
CFD130	Classic Flexi Decoup Original	30m / 100cm / 3mm	Premium
DUR047	Decoup Original Anti-Crack Matting	5m × 1m	Premium
DUR709	Decoup Original Anti-Crack Matting	30m × 1m	Premium
FAB500	Fabriteq Stress Relief / Waterproof Mat	50m	—

THERMABOARD & ULTRA LIGHT BACKER BOARDS

THERMABOARD

- Totally impervious to moisture – a waterproof barrier when used with waterproof joint tape
- Creates a thermal layer improving underfloor heating efficiency
- Tested to hold a tile weight of 62 kg/m²
- Lightweight and easy to cut, making preparation time faster
- 6mm, 10mm and 12mm boards can be used on solid walls, concrete or sheet timber floors prior to tiling

ULTRA LIGHT BOARD

- 100% waterproof – protects the surface beneath
- Light and easy to use – 1.2 kg/m², holds up to 20 kg/m²
- Cuts easy – grid pattern for easy measure and cut
- Easier to spread adhesive onto
- Heat resistant – high temperature tolerance
- Indoor use – ideal for baths, basins, showers and wetrooms



THERMABOARD – INSULATED TILE BACKER BOARD



ULTRA LIGHT BOARDS – BATHROOMS & WETROOMS

WHICH THICKNESS?

THICKNESS	TYPICAL USE
6 mm	Solid walls, concrete or sheet timber floors prior to tiling
10 mm	Wall linings and light insulation over solid backgrounds
12 mm	Floors and walls where extra rigidity is needed
20 mm	Maximum thermal layer – underfloor heating build-ups

Fix with THERMABOARD washers and screws; seal joints with waterproof tape – see page 14.

DID YOU KNOW?

THERMABOARD is tested to hold a tile weight of 62 kg/m².

ORDER CODES

CODE	PRODUCT	BOARD SIZE	THICKNESS
THB810	THERMABOARD	1200 × 600 mm	6 mm
THB811	THERMABOARD	1200 × 600 mm	10 mm
THB814	THERMABOARD	1200 × 600 mm	12 mm
THB817	THERMABOARD	1200 × 600 mm	20 mm
ULB072	ULTRA LIGHT BOARD	1200 × 600 mm	6 mm
ULB073	ULTRA LIGHT BOARD	1200 × 600 mm	10 mm
ULB074	ULTRA LIGHT BOARD	1200 × 600 mm	12 mm

**THERMABOARD WASHERS WITH HOLES – 100 PCS****VOLUME PRODUCT****THB022**

Used with screws to strengthen the anchorages and connections between boards, with holes for maximum adhesion. Galvanised. Diameter 36mm, centre hole 5mm, countersunk, perforation size 9mm.

**THERMABOARD WASHERS – PACK OF 100****VOLUME PRODUCT****THB828**

Used with screws to strengthen the anchorages and connections between boards. Galvanised to provide long-term durability.

**STAINLESS STEEL WASHERS****NEW****THB830**

Stainless steel washers for use with screws to strengthen the anchorages and connections between boards – maximum corrosion resistance for wet areas and exterior work.

**TILE BACKER BOARD SCREWS – 25MM & 38MM, 150 PCS****THS759 (25mm) • THS760 (38mm)**

Use with THERMABOARD washers to strengthen the anchorages and connections between boards. Yellow zinc plated, self-tapping, star head. Always check screw length suitability before fixing.

**SELF-ADHESIVE THERMABOARD TAPE – 5M****SAT023**

Self-adhesive waterproof joint tape for THERMABOARD and niches. Thickness 0.8mm, width 80mm, length 5m. Waterproof – prevents leaks. For walls and floors, indoor and outdoor use.

**FIBREGLASS JOINT TAPE 50MM × 20M****TBT536**

Fibre glass seam tape to reinforce joints where THERMABOARDS meet. Self-adhesive for ease of fixing, helps prevent movement. Waterproofing required: replace glass fibre tape for waterproof joint tape.

**FOLDING BACKER BOARD KNIFE****FBK139**

Suitable for all backerboard types. Serrated blade for cutting mesh, folding design for safe storage, strong and lightweight with belt clip.

TROWELS & GROUT FLOATS



CORK HANDLE STAINLESS STEEL TROWELS – 4 / 6 / 8 / 10 / 12MM

UK'S MOST COMFORTABLE TROWEL

CHT739 · CHT740 · CHT741 · CHT742 · CHT743

Industry best-grip cork handle trowels – the Tiger Trowel LATICRETE use in their own training. Square notch, stainless steel blade, 13-spot rivet mounting. Use with every adhesive in this brochure.

Which size? 4mm – matting & mosaics · 6, 8 & 10mm – tiles · 12mm – large-format tiles.



SUPER FLEX GROUT FLOAT **BEST SELLER**

SFGF42


Perfect for cement and epoxy grouts – pair it with PERMACOLOR and SPECTRALOCK PPG. Maximum flex, suitable for tiles, porcelain, pavers and much more. Round and square corners, cushioned handle, for textured tile and natural stone.



CORK HANDLE GROUT FLOAT

CHF744

Lightweight float for wall and floor tile grouting. White face bonded to a dense rubber foam, stainless steel backing, easy to clean and durable. Cork handle – the industry best grip.



CORK HANDLE UNIVERSAL / EPOXY GROUT FLOAT

CHUF746

Universal grout float for all grouts including epoxy – ideal with SPECTRALOCK PPG. Blue face bonded to a dense rubber foam, stainless steel backing, easy to clean and durable.

500+ TOOLS AND CONSUMABLES IN STOCK.

Trowels, cutters, levelling systems and everything in between – browse the full range online or call the counter.



SEE FULL RANGE

TRADE COUNTER

01543 500893



THE COMPLETE SOLUTION, ONE COUNTER.

SPEAK TO OUR TEAM TODAY

01543 500893

1

FIND YOUR PRODUCTS

In this brochure, in our catalogue or online at tilerite.co.uk.

2

CHECK THE DETAILS

Full specifications and data sheets on every product page online.

3

PLACE YOUR ORDER

By phone on 01543 500893, by email to sales@tilerite.co.uk, or via the customer portal.

IN PARTNERSHIP WITH



Benfer®
Building Product Systems

TILERITE.CO.UK