


## Doorway Strip



## Product Description

## Dimensions and Colour

## Specification Drawings

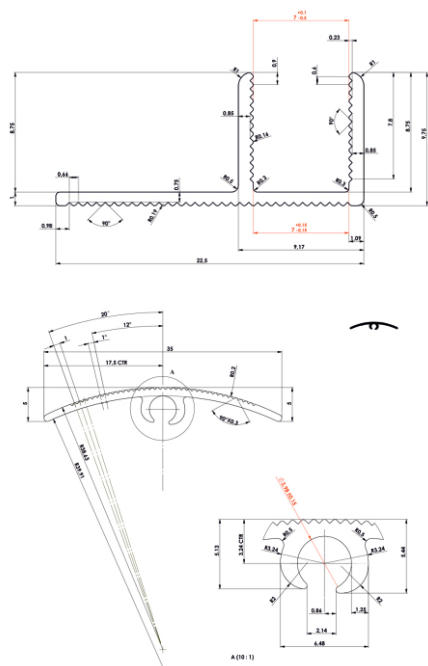


CODE	DEPTH	LENGTH	FINISH
DSG262	<15MM	900MM	GOLD
DSS263	<15MM	900MM	SILVER
LSDG764	<15MM	2600MM	GOLD
LDSS763	<15MM	2600MM	SILVER

CODE	LENGTH	FINISH
DTG816	900MM	GOLD TOP ONLY
DTS812	900MM	SILVER TOP ONLY


**LAY NEW FLOORING HERE**

10mm 10mm

- ④ Lay your flooring type on top of the base plate, again leave a 10mm expansion gap between the floor and raised channel of the base plate.
- ⑤ After laying your floor type, cut the capping to fit with a hacksaw.
- ⑥ Select the appropriate clip size for the job, this will depend on the thickness of the floor and the drop from one floor to another.
- ⑦ Slide the clips into the socket feature of the capping strip.

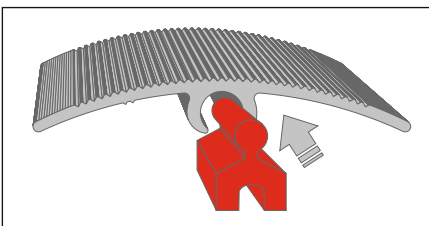

- 8 Position the capping strip over the base plate. Ensure pips on underside are over lowest floor height. Tap into position so that both floor edges are gripped. Take care not to damage top surface of cap.

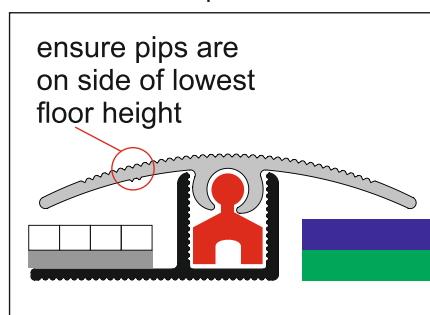

## Material

Top is made with 6063-T5 aluminum.

Aluminium Bar 6063 - T5	
Si%	0.39 - 0.42
Fe%	0.12 - 0.14
Cu%	0.002 - 0.006
Mn%	0.001 - 0.002
Mg%	0.5-0.6
Zn%	0.006 - 0.01
Ti%	0.008 - 0.01
Cr%	0.001
Al	remaining
For Indoor Use	
Strength of extension	130-230Mpa
Coefficient of extension	25%
Elastic coefficient	68.9GPa
Bearing Yield Strength	103MPa
Poisson's ratio	0.33
Fatigue strength	62.1MPa
Solution temperature	520°C
Annealing temperature	415°C
Melting temperature	615-655°C
Specific heat capacity	900