

SPECIFICATION SHEET

Contemporary Range - L Shape Trim (E-Coated)



• T: 01543 500893 • F: 01543 500894 • E: sales@tilerite.co.uk • W: tilerite.co.uk

Product Description

The Tile Rite Contemporary range of trims are made of 6463 aluminium. This unique tile trim offers an attractive, professional finish to ceramic tile counters and walls.

Tile Rite L Shape trims are easy to mitre, making them versatile enough to create features such as; surrounding a window frame, part tiled walls, external corners & splashbacks.


Dimensions and Colour

Available in 10mm and 12mm depths and E-Coated finishes of Brushed Antique Copper and Brushed Antique Gold.

Length 2.44m





Brushed Copper



Brushed Gold

Specification Drawings

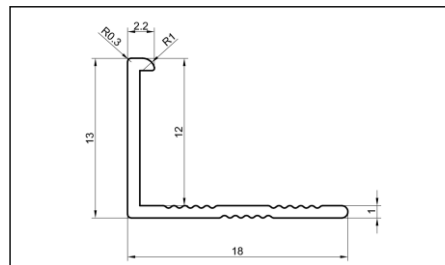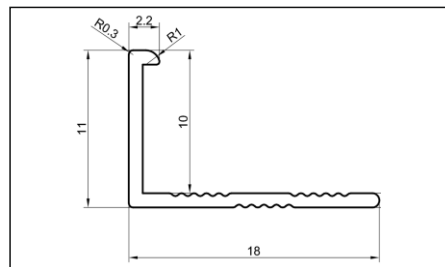

Ordering Information

CODE	DEPTH	LENGTH	FINISH
CLT896	10MM	2.44M	BRUSHED COPPER
CLT897	12MM	2.44M	BRUSHED COPPER
GLT911	10MM	2.44M	BRUSHED GOLD
GLT192	12MM	2.44M	BRUSHED GOLD



Technical Details

The Brushed Antique Copper & Brushed Antique Gold trims are Electrophoresis coated. This is a high adhesive coating film with great impact resistance, high corrosion resistance and is resistant to cement, mortar and acid rain invasion. The E-Coating also gives a colourful and metallic luster.

Electrophoresis is a high quality finish and therefore the process is more expensive than anodising.

Maintenance

Tile Rite Contemporary range E-Coated trim does not require any special maintenance.

The E-Coated layer creates a finish that retains a uniform appearance during normal use. The surface, however, may be susceptible to scratching and wear and may be damaged by tile adhesive, mortar, or grouting material. Therefore, setting materials must be removed immediately.

Clean periodically with a soft cloth and a PH neutral cleaner & warm water.

Installation

- 1 Select trim according to tile thickness.
- 2 Trowel tile adhesive over the area that forms the perimeter of the tiled covering.
- 3 Press the perforated anchoring leg of the trim into the tile adhesive and align, mechanical fix if required.
- 4 Trowel additional adhesive over the perforated anchoring leg to ensure full coverage.
- 5 Solidly embed the tiles so that the tiled surface is flush with the top of the profile, the profile should not be higher than the tiled surface, but rather up to approximately 1mm lower.
- 6 Fill the join completely with grout.

Aluminium AA 6463 T6	
Si%	0.20 - 0.6
Fe%	0.15
Cu%	0.2
Mn%	0.05
Mg%	0.45 - 0.9
Zn%	0.05
Ti%	0.05
Cr%	0.05
Pb	0.15
Al	98