

SPECIFICATION SHEET

Profile Plus® Tile Trim



MADE IN THE UK




✓Impact Absorption Zone ✓No Cracking of Grout ✓Better Quality ✓Better Value ✓British Made

• T: 01543 500893 • F: 01543 500894 • E: sales@tilerite.co.uk • W: tilerite.co.uk

Product Description





Tile Rite Profile Plus PVC tile trim is designed to protect and decorate tiled outer wall corners and other tiled edges prone to damage. Our unique Impact Absorption Zone is the design feature that makes the Profile Plus anything but “standard”. This important zone allows the edge strip to absorb impacts without the grout cracking or tiles chipping.

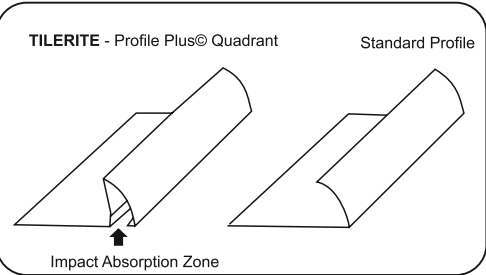

Dimensions and Colour

Available in 6mm, 7mm, 9.5mm & 12mm internal depths and 2.44m lengths. For colour options see colour chart.

Specification Drawings

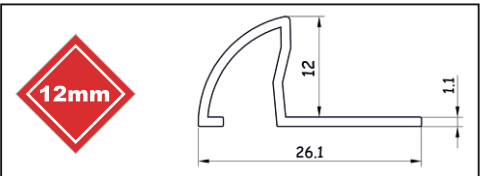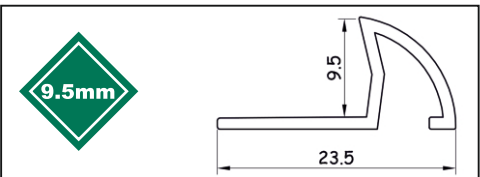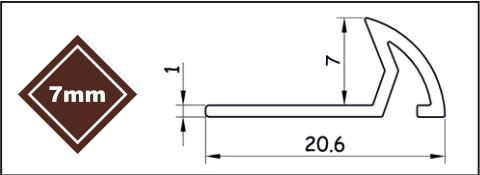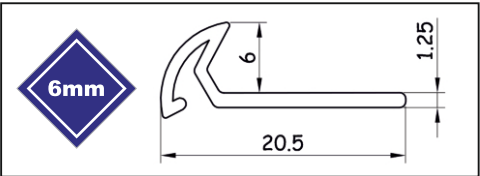

Technical Details


PVC is particularly suitable for a wide range of applications due to its excellent chemical resistance. Exceptions: Not recommended for use above 60°C. Resistant to most oils, alcohols, petrol and fats. It is unsuitable for use in contact with aromatic and chlorinated hydrocarbons, ketones, nitrocompounds, esters and cyclic ethers.

Installation

- 1 Select trim according to tile thickness.
- 2 Trowel tile adhesive over the area that forms the perimeter of the tiled covering.
- 3 Press the perforated anchoring leg of the trim into the tile adhesive and align, mechanical fix if required.
- 4 Trowel additional adhesive over the perforated anchoring leg to ensure full coverage.
- 5 Solidly embed the tiles so that the tiled surface is flush with the top of the profile, the profile should not be higher than the tiled surface, but rather up to approximately 1mm lower.
- 6 A grout gap is not necessary, however if a gap is visible ensure grout is compressed firmly into the gap.

GRADE: LG0000 - The raw material used in the manufacture of these products is calcium zinc stabilized formulation and contains no lead or substances of very high concern (SVHC). It is fully compliant with WEEE & RoHS Directives.
DESCRIPTION: Calcium Zinc stabilized Extrusion grade PVC, suitable for indoor use.

PROPERTY	UNIT	RESULT	TEST METHOD
Specific Gravity (According to Colour)	G/ccM	1.42	ASTM D692
Vicat Softening Point	°C	78	BS2782:120B
Apparent Modulus of Elasticity	Mpa	2300	BS2782:335A
Tensile Strength	Mpa	40	BS2782:320C
Impact Strength	KJ/M2	12	BS2782:359
Heat Stability	Mins	88	BS2782-130A

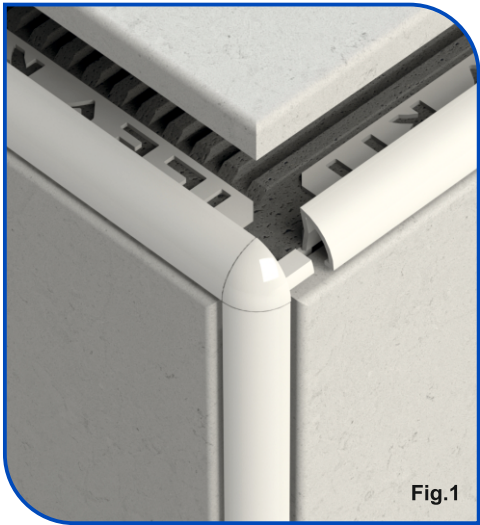

Complimentary Products

These profiles have specifically designed external corner pieces to provide a perfect 2 or 3-way join where profiles meet *see image. Available in 7mm, 9.5mm & 12mm depths

Maintenance

Tile Rite Profile Plus® requires no special maintenance. Cleaned periodically using a PH neutral detergent to maintain the appearance. Regular cleaning aids the longevity of the profile and ensures there is no corrosion that could affect safety.